


O Series Four-Way Articulating Borescopes

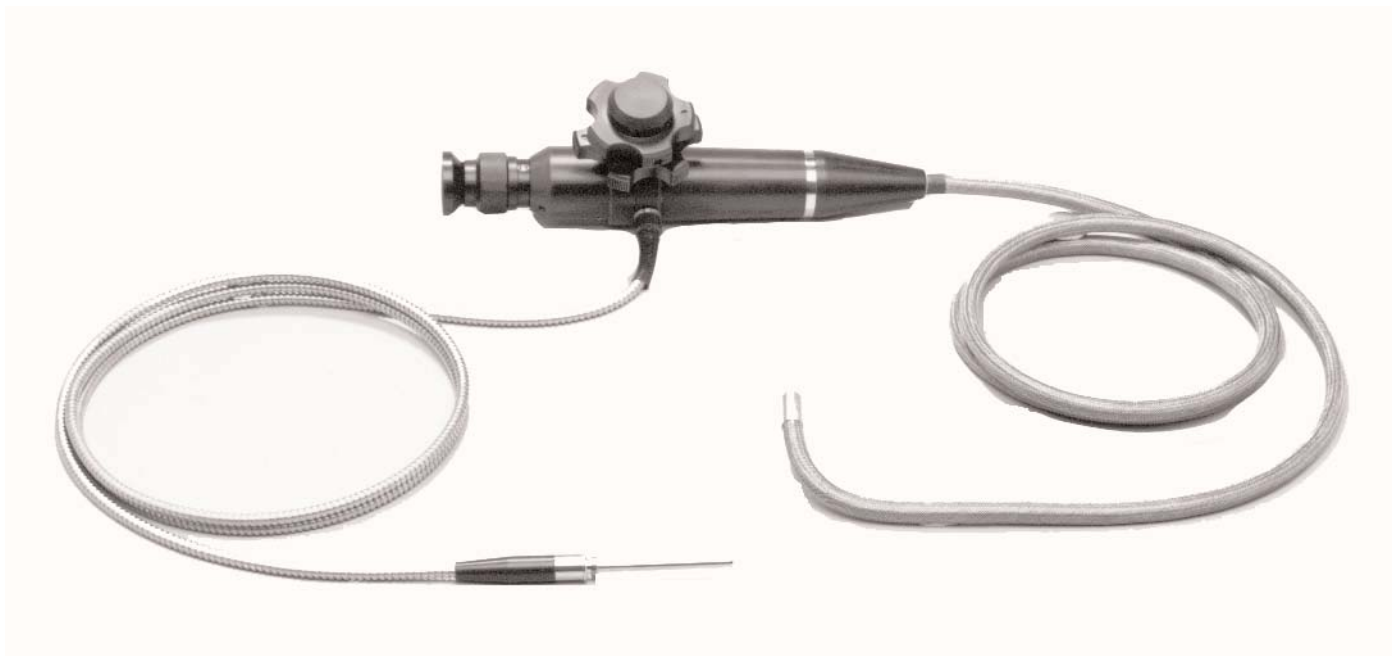

O Series borescopes feature two control knobs to enable four-way articulation of the viewing head, plus the high resolution of 10,000 viewing fibres. Five models provide working lengths from 40" to 360" (1016mm to 9144mm). A 90° viewing head, allowing for straight-forward and right-angle viewing is available as an option. A 5-1/2-ft. fibre bundle comes standard to connect the unit to an illumination source. The O Series borescope is also video adaptable.

Features & Specifications

Diameter: 0.394 (10mm)
 Flexible Length: Five lengths of 40", 80", 120", 240" & 360" (1016mm, 2032mm, 3048mm, 6096mm & 9144mm)
 Minimum Bend Radius: 3" (76.2mm)
 Illumination: Fibreoptic
 Eyepiece
 Magnification: 25X
 Field of View: 55°
 Focal Length: 0.20" to 4.5" (5.1mm to 114.3mm)
 Maximum Temperature: 302°F (150°C)
 Other Features: 5-1/2-ft. fibre bundle to connect borescope to illumination source.
 Braided stainless steel sheathing
 Adaptable for video
 Carrying case

Accessories & Options

- O-90 Viewing Head Adapter for 90° right-angle viewing
- FOI-250 High-Intensity Fibreoptic Illuminator with 250W quartz halogen lamp
- TSVD-30 Video Adapter

O Series Ordering Information

Model Number	Flexible Length	Price
O-40	40" (1016mm)	\$ 6,200.00
O-80	80" (2032mm)	8,600.00
O-120	120" (3048mm)	10,500.00
O-240	240" (6096mm)	13,750.00
O-360	360" (9144mm)	15,500.00
Accessories & Options		
O-90	90° right-angle viewing adapter	\$ 525.00
FOI-250	250 Watt Fibreoptic Illuminator	\$ 595.00
TSVD-30	Video Adapter	\$ 550.00