


L Series Fibreoptic Micro-Borescopes

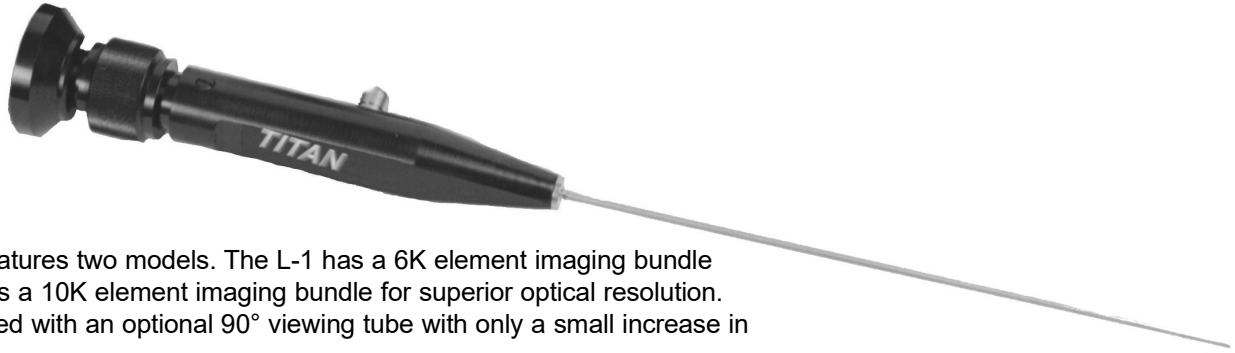

The L Series features two models. The L-1 has a 6K element imaging bundle and The L-2 has a 10K element imaging bundle for superior optical resolution. Both can be fitted with an optional 90° viewing tube with only a small increase in diameter.

Made in the USA!

Features & Specifications

- Diameters: 0.039" & 0.078" (1mm & 2mm)
- Working Length: 6" (152mm) OR 12" (305mm)
- Illumination: Not Included
- Field of View: 42° for smaller-diameter L-1 model
50° for larger-diameter L-2 model
- Magnification: 30X Eyepiece Magnification
- Focal Length: 0.118" to 0.236" (3mm to 6mm)
- Other Features: 90° viewing tube for two models
increases diameters to 0.045" and 0.084" (1.1mm and 2.1mm)

Accessories & Options

- FOI-150 Fibreoptic Illuminator with 150W quartz halogen lamp
- FB-6 Fibre Bundle to connect fibreoptic illuminator to the borescope
- 3 Watt LED Battery Handle
- TSVD-30 Video Adapter

L Series Ordering Information

Model Number	Diameter	Viewing	Field of View
L-1-6	.039" (1mm)	Straight-Forward	42°
L-1-6-90	.045 (1.1mm)	Angular 90°	42°
L-1-12	.039" (1mm)	Straight-Forward	42°
L-1-12-90	.045 (1.1mm)	Angular 90°	42°
L-2-6	.078" (2mm)	Straight-Forward	50°
L-2-6-90	.084" (2.1mm)	Angular 90°	50°
L-2-12	.078" (2mm)	Straight-Forward	50°
L-2-12-90	.084" (2.1mm)	Angular 90°	50°

Accessories & Options

FOI-150	150W Fibreoptic Illuminator
FB-6	Fibre Bundle
LED-BH3W	3 Watt LED Battery Handle
TSVD-30	Video Adapter